


Schüco ASS 70 FD

Aluminium folding/sliding system



The Schüco folding/sliding system


ASS 70 FD is a thermally insulated construction, which offers the benefits of a wide choice of styles and a high level of transparency. Different requirements can be met. For example, the option of a flush threshold profile provides an easy-access entrance.

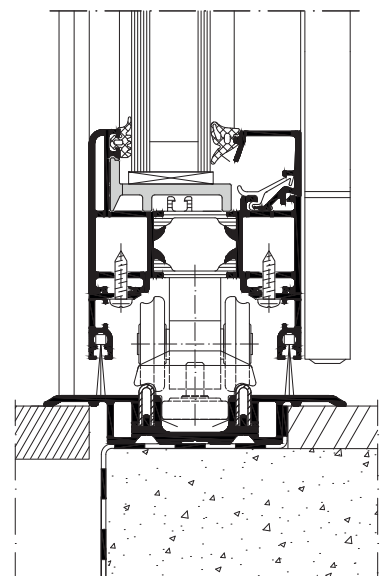


Schüco ASS 70 FD, scale 1:2

Schüco ASS 70 FD

Aluminium folding/sliding system

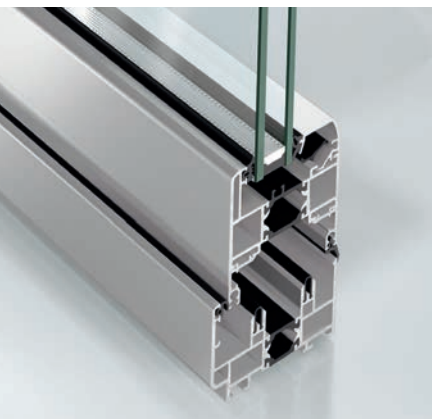

Schüco ASS 70 FD

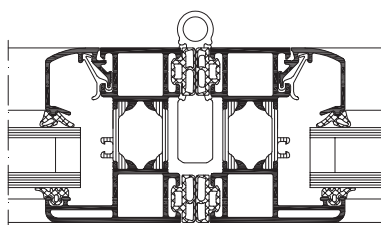

Schüco ASS 70 FD, scale 1:3

Schüco ASS 70 FD

Product benefits

- Narrow face widths from 120 mm (Standardfold)
- Suitable for use in public and residential property
- Can also be used for balcony glazing
- Watertightness up to class 9A in accordance with DIN EN 12208
- Units can be moved to the right, to the left, inwards or outwards, as required
- Wide choice of colours, different colours inside and outside
- Up to sound reduction class 4, depending on the glazing
- Glazing thickness of 6 – 45 mm
- Additional opening type with 90° corner for more design freedom
- Flat threshold with watertightness for increased comfort and ease of access
- Stainless steel track and stainless steel rollers for a smooth and durable operation

Fabrication benefits

- Screw-type corner cleats for simplified installation of the outer frame on site; particularly economical when transporting large units
- Jamb adaptor profile and adjustment device for retrospective adjustment in door panel alignment.

Technical data	Value
Thermal insulation	U_w from 2,4 W/(m²K)
Basic depth of vent frame F	70 mm
Vent size (HxW)	max 3.000 x 1.200 mm
Max. weight for each door panel	100 kg
Security class	RC2 (WK2)
Number of tracks	1

Schüco Adelaide
www.schuecoadelaide.com.au

SCHÜCO
Partner

KR **SCHÜCO**
INSTALLATIONS Partner

Contact details:
Phone: (08) 8177 0705

www.krinstallations.com.au
www.schuecoadelaide.com.au