


Schüco ASS 70.HI

Aluminium lift-and-slide system



The highly thermally insulated aluminium lift-and-slide system Schüco ASS 70.HI with its perfect watertightness, excellent sound reduction and burglar resistance up to RC2 (WK2) is second to none. The modular profile insulation allows U_f values from $2.0 \text{ W/(m}^2\text{K)}$, whereby U_w values of $< 1.3 \text{ W/(m}^2\text{K)}$ are achieved. With large opening widths and easy operation, Schüco ASS 70.HI offers new system solutions for large projects and luxury homes.

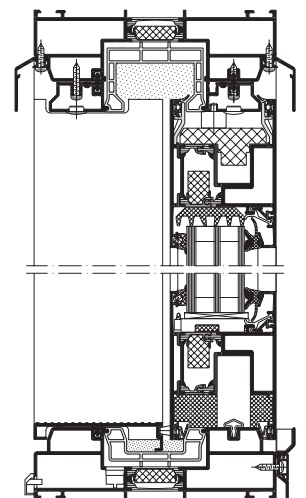

Schüco ASS 70.HI, scale 1:5

Schüco ASS 70.HI

Aluminium lift-and-slide system



Schüco lift-and-slide system ASS 70.HI

Schüco ASS 70.HI

Product benefits

- Excellent drainage system with watertightness up to 1,050 Pa
- Vent weight up to 400 kg
- High-quality fittings components for easy operation
- High degree of transparency due to large vent sizes of up to 9 m², depending on the design
- Sound insulation in accordance with DIN EN ISO 140-03 and DIN EN ISO 717-1, $R_w \leq 44$ dB
- Glass thickness up to 52 mm
- Wide choice of colours – different colours inside and outside



Fabrication benefits

- Greater flexibility due to option for customer to roll profiles together

Technical data	Value
Thermal insulation	U_w from 1,3 W/(m ² K)
Basic depth of vent frame	70 mm
Vent size (WxH)	3.000 x 3.000 mm
Vent weight	400 kg
Security class	RC2 (WK2)
Number of tracks	1 – 3



SCHÜCO

Partner

Contact details:

Phone: (08) 8177 0705

www.krinstallations.com.au

www.schucoadelaide.com.au