


Schüco SmartStop and Schüco SmartClose

New technology for increased safety and ease of operation with sliding systems



Schüco SmartStop

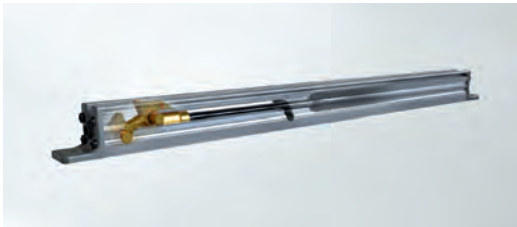


Schüco SmartStop uses innovative technology to provide a new standard of operating security for lift-and-slide and sliding doors with vent weights of up to 400 kg. When the moving vent is being closed outside of the possible crushing zone, it is stopped gently and securely by means of an absorber mechanism – even when accelerating rapidly. The vent can then be pushed into the outer frame and locked. Schüco SmartStop also features impressive design and service: the wireless mechanical system is concealed in the vent profile and offers easy maintenance including re-adjustment without needing to remove the vent.

Schüco SmartClose

Schüco SmartClose

The innovative Schüco SmartClose system sets new standards of operating convenience for lift-and-slide systems with vent weights up to 300 kg. A wireless absorber mechanism gently stops the moving vent and pulls it almost silently into its end position in the outer frame. The vent then only needs to be locked manually. Other system benefits include that the profile-integrated solution is incorporated invisibly into the harmonious sliding door design and can also be used on the opening side to further increase the level of convenience. Schüco SmartClose offers easy maintenance including re-adjustments without the need to remove the vent.

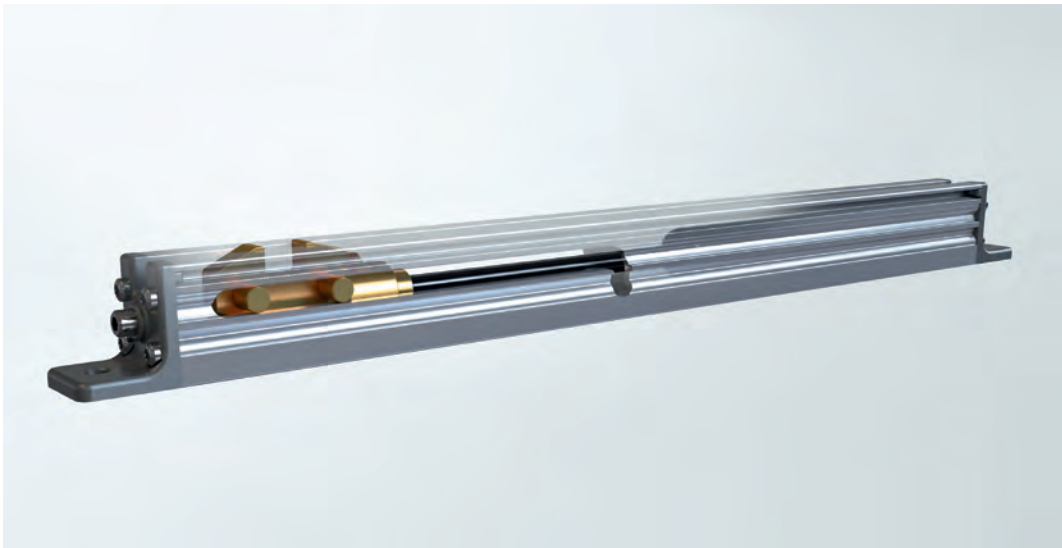


Schüco SmartClose is available for premium sliding systems

Technical data	SmartStop	SmartClose
Length	403 mm	336 mm
Width	21,5 mm	21,5 mm
Height	27,5 mm	27,5 mm
Weight	0,41 kg	0,33 kg
Maximum vent weight	400 kg	300 kg
Use in sliding systems	ASS 50, ASS 70.HI	–
Use in lift-and-slide systems	ASS 50, ASS 70.HI	ASS 50, ASS 70.HI

	Product benefits
	Design
	▪ Profile-integrated solution for an harmonious appearance
	Enhanced functions
	▪ Increased security and operating convenience ▪ New wireless Schüco absorber technology: can be used for moving vents up to 150 kg or up to 300 kg ▪ Can also be used on the opening side ▪ Almost silent operation
	Fabrication benefits
	▪ Simple installation in the fittings groove ▪ Fast revision and re-adjustment without needing to remove the vent ▪ Can be used in Schüco ASS 50 and Schüco ASS 70.HI lift-and-slide and sliding systems ▪ Suitable for retrofitting existing Schüco systems

Schüco Sliding Systems ASS

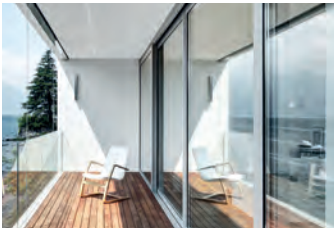

With Schüco SmartStop and Schüco SmartClose, Schüco sets new standards of operating security and convenience for the moving vents of sliding systems. The profile-integrated, wireless solutions feature an harmonious design as well as simple installation and maintenance.

Schüco Adelaide
www.schuecoadelaide.com.au

The latest from the social
networks at:
www.schueco.de/newsroom

Schüco – System solutions for windows, doors and façades
Based in Bielefeld, the Schüco Group develops and sells system solutions for windows, doors and façades. With more than 4900 employees worldwide, the company strives to be the industry leader in terms of technology and service today and in the future. In addition to innovative products for residential and commercial build-ings, the building envelope specialist offers consultation and digital solutions for all phases of a building project – from the initial idea through to design, fabrication and installation. 12,000 fabricators, developers, architects and investors around the world work together with Schüco. The company is active in more than 80 countries and achieved a turnover of 1.575 billion euros in 2017. For more information, visit www.schueco.com



Contact details:
Phone: (08) 8177 0705

www.krinstallations.com.au
www.schuecoadelaide.com.au